GOLDEN®
BOAT LIFTS



CONCRETE DOCKS


CONCRETE DOCKS: Custom Engineered & Designed for Versatility

Golden Concrete floating docks are custom-engineered and designed for versatility. They are available in widths ranging from 6′ to 12′, enabling easy transport via over-the-road trucking. For larger applications, multiple units can be securely bolted together to achieve greater widths.

The standard freeboard height is 18″ to 22″; however, the system be customized to meet specific project requirements. Additionally, breakwater docks are available with the option to add keels to the bottom of the dock for enhanced stability and wave attenuation.

FEATURES

- Reinforced Concrete 7,500 PSI – 3.5″ Thickness
- Hot Dipped Galvanized Reinforced Rebar Anchoring Systems Available
    - Piling (Concrete, Steel)
    - Blocks and/or Chain
- Custom Utility Races
- Cleats and Bollards
- Heavy Duty Aluminum or Stainless Pile Guides w/ UHMV Rollers
- Noise Free Neoprene 70 Durometer Connecting Blocks
- Virgin Expanded Polystyrene Foam Core with 1.0 Density
- No Structural Timber eliminating rot, cracks or wear out
- No Thru-Rods to Tighten – Zero Maintenance

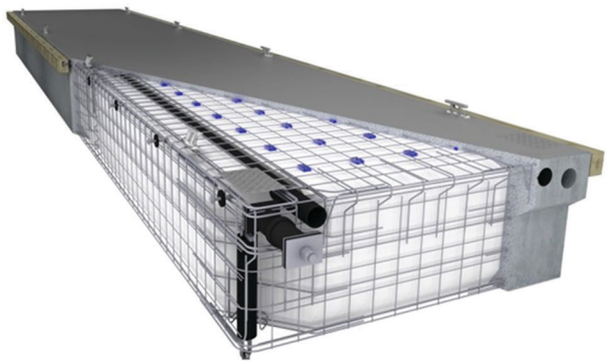



GOLDEN® BOAT LIFTS

Copyright © 2026 Golden Boat Lifts

239.337.4141
sales@GoldenBoatLifts.com
GoldenBoatLifts.com